
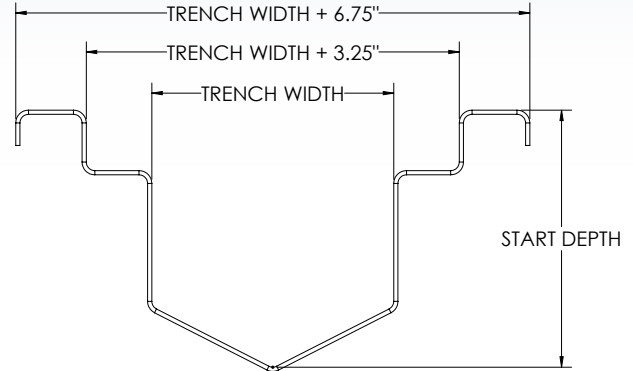


# Trench Drain

## SPEC SHEET

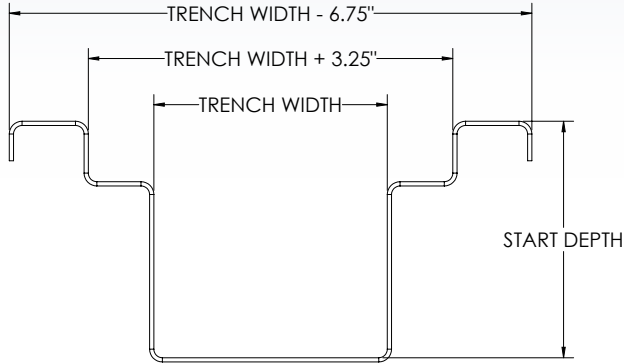

### Trench Length:

\_\_\_\_\_ Feet

### Trough Width:

- 6" (Standard)
- 9" (Standard)
- Other \_\_\_\_\_

### Trough Profile:

- V-Bottom
- Flat-Bottom

### Material Thickness:

- 12 GA (Standard)
- 10 GA

### Material Type:

- 304 S.S. (Standard)
- 316 S.S.

### Slope/Ft:

- 1/8" (Standard)
- 1/4"
- 1/16"

### Outlet Size:

- 3"
- 4" (Standard)
- 6"
- Other \_\_\_\_\_

### Outlet Schedule:

- Sch. 10
- Sch. 40

### Outlet Location:

- Center
- End

### Outlet Strainer:

- Yes
- No

### Sump Basin:

- No (Outlet Only)
- 12" Long
- 24" Long
- Other \_\_\_\_\_

### Cover Options (Forklift Rated):

- Bar Grate
- Solid Plate (w/perimeter drainage)

### Cover Options (Non-Forklift Rated):

- 10 GA Perforated Grate
- 10 GA Slotted Grate
- Chem Grate

### Leveling Brackets:

- Yes
- No



Contact AWI Manufacturing for other custom options.

Winsted, Minnesota | Phone 320.485.2471 | Email customerservice@awimfg.com | [awimfg.com](http://awimfg.com)