


Trench Drains

TDV Series | V-Bottom

SPEC SHEET

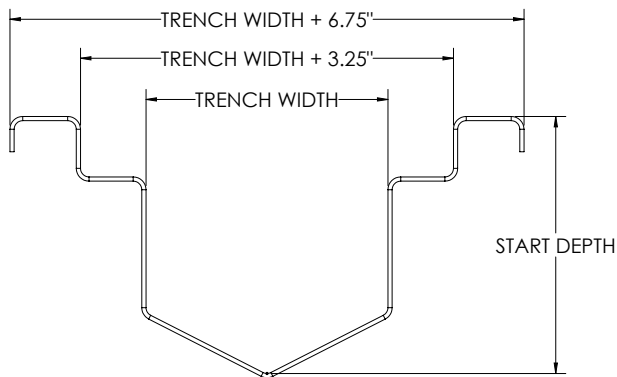

Trench Length

_____ Feet

Trench Width

- ☐ 4"
- ☐ 6" (standard)
- ☐ 9" (standard)
- ☐ 12"
- ☐ Other _____

Start Depth

- ☐ 5" (standard)
- ☐ Other _____

Material Thickness

- ☐ 12 GA (standard)

Material Type:

- ☐ 304 stainless steel (standard)
- ☐ 316 stainless steel

Slope/Ft

- ☐ 1/8" (standard)
- ☐ 1/4"
- ☐ Other _____

Outlet Size

- ☐ 3"
- ☐ 4" (standard)
- ☐ 6"
- ☐ Other _____

Outlet Schedule

- ☐ Schedule 10
- ☐ Schedule 40

Outlet Location

- ☐ Center
- ☐ End
- ☐ End/Side

Outlet Strainer

- ☐ Yes (standard)

Sump Basin

- ☐ No (outlet only)
- ☐ 12" long
- ☐ 24" long
- ☐ Other _____

Cover Options (Forklift Rated)

- ☐ Bar grate
- ☐ Solid plate (w/perimeter drainage)

Cover Options (Non-Forklift Rated)

- ☐ 10 GA perforated grate
- ☐ 10 GA slotted grate
- ☐ Chem grate



Contact AWI for custom options.

Phone 320.485.2471 | Email customerservice@awimfg.com | awimfg.com